



68-700 Avenida Lalo Guerrero Cathedral City, CA 92234 760-770-0340

## TRASH ENCLOSURE

**STANDARD** 

**BUILDING DEPARTMENT** 


SCALE:	<b>AS SHOWN</b>

1/4" = 1'-0"


DATE: FEBRUARY 2017

SHEET: 1 OF 2

DRAWN BY: AJ

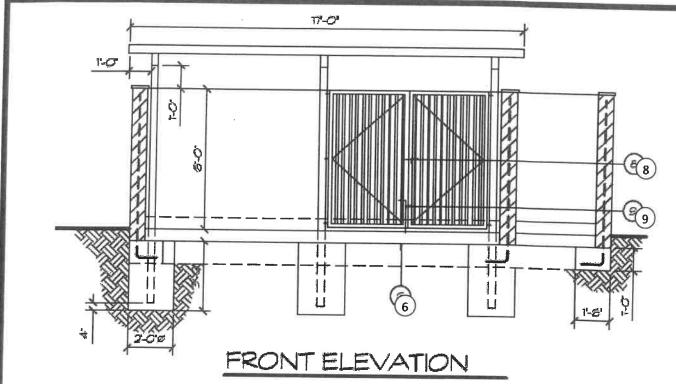

1/4 = 1'-0'

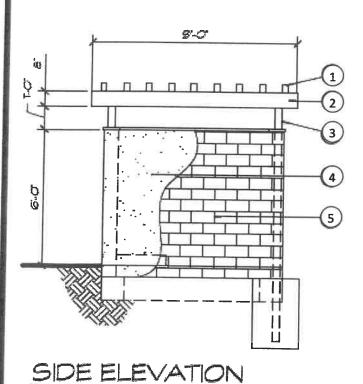

## **NOTES:**

- 1. 3x3 TS @ 12" OC TRELLIS
- 2. 4x6 TS BEAM
- 3. 4x4 TS SUPPORT COLUMNS
- 4. SKIM COAT STUCCO
- 5. 8X8X16 CONCRETE BLOCK. #4 REBAR VERT. @ 24" OC CENTERED; #4 REBAR HORIZ. BOND BEAM @ MID-HEIGHT AND TOP COURSE; SOLIDLY GROUTED; DECORATIVE BLOCK CAP.
- 6" CONCRETE SLAB W/ #3 REBAR @ 18" OC EACH WAY OVER 90% COMPACTED BASE. 2% MIN. - 4% MAX SLOPE TO DRAIN.
- 7. 6" CONCRETE CURB (WHEEL STOP), TYPICAL @ INSIDE PERIMETER.
- 8. SLIDE BOLT PER CITY STANDARDS.
- 9. CANE BOLT PER CITY STANDARDS.
- 10. 2x3 TS GATE FRAME, MITER CUT & WELD CORNERS; GRIND ALL CORNERS SMOOTH; 1-1/2" x 3/8" BAR STOP WELDED FLUSH WITH INSIDE FACE OF FRAME.

ALTERNATIVE MATERIALS REQUEST SHALL BE SUBMITTED AND APPROVED PRIOR TO INSTALLATION, AS PER 2016 CBC 104.11



TRASH ENCLOSURE

1/4 = 1'-0'

**STANDARD** 

**BUILDING DEPARTMENT** 

SCALE:

**AS SHOWN** 

DATE:

FEBRUARY 2017

SHEET:

2 OF 2

DRAWN BY:

AJ